
GE Honda Aero Engines Acceptance Test Report

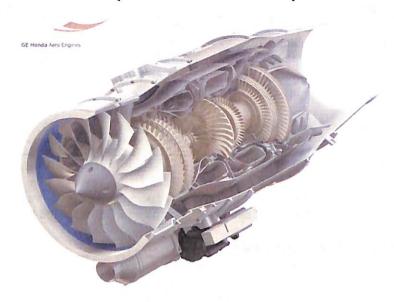

Engine Model Designation: HF120

Engine Serial Number: 883327

Test Date: 9/28/2017

O 5F.1-2 Revision: 07

GE Honda Aero Engine PROPRIETARY INFORMATION

The information contained in this document is GE Honda Aero Engines (GHAE) proprietary information and is disclosed in confidence. It is the property of GHAE and shall not be used, disclosed to others or reproduced without the express written consent of GHAE, including, but without limitation, it is not to beused in the creation, manufacture, development, or derivation of any repairs, modifications, spare parts, designs, or configuration changes or to obtain FAA or any other government or regulatory approval to do so. If consent is given for reproduction in whole or in part, this notice and the notice set forth on each page of this document shall appear in any such reproduction in whole or in part. This technical data is considered EAR controlled pursuant to 15 CFR Parts 730-774. Transfer of this data by any means to a Non-US Person, whether in the United States or abroad, without the proper U.S.Government authorization (e.g., License, exemption, NLR, etc.), is strictly prohibited. The information contained in this document may also be controlled by the Japanese export control laws. Unauthorized export or re-export is prohibited. This document contains trade secrets and confidential commercial or financial information exempt from disclosure under the FREEDOM OF INFORMATION ACT (FOIA) 5 USC § 552(b)(4).

F 5F.2-2 Rev 10

Page: 1 of 3

ACCEPTANCE TEST REPORT:

GE HONDA AERO ENGINES - HF120

ESN:

883327

DATE:

9/28/2017

CELL: HAI-B1

Uninstalled Stand	ard Day Performa	nce (15°C):			T2 at Takeoff:	28.9	°C
Power	FN Spec:	SFC Spec:	SFC Actual:	SFC %	SFC Wtg		
Point	(lbf)	(pph/lbf)	(pph/lbf)	Margin	•		
Takeoff:	2036.1	NA	0.4605	NA	85%		
Part Pwr:	1417.7	NA	0.4530	NA	15%		
Weighted SFC:		0.4698	0.4594	2.2%			
Idle	PM TRA	FNK2	FN Spec	T2	Idle %		
Setting	°Angle	(lbf)	(lbf)	(°C)	Margin		
Flight	10.3	116.8	122.3	29.7	4.5%		
Ground	10.3	94.8	99.1	29.8	4.3%		

NOTE: Idle FN values are adjusted to SL static and to the uninstalled acceptance configuration. Idle Spec Thrust schedules are based on measured cell T2 and compared to the adjusted thrust level.

Uninstalled Performance at Rated Fan Speed (ISA +10°C):

Power	N1KD (rpm):	N2 (rpm):	Thrust (lbf):		ITT (°C):		T2:
Setting	Spec	Actual	Actual	Spec	Actual	Spec	(°C)
Takeoff:	17042.0	48537	2114.0	2074.6	809.1	NA	25
Max. Cont.	16701.0		2005.3	1966.1	791.8	810.0	25

Demonstrated Nameplate Thrust (lbf): RDG#: 35 Max Unistalled Act: 2128.0 Minimum: 2095.0

Uninstalled Engine Trim Summary (N1 and ITT Trim Applied):

	Trim	Applied	
N1 Trim	ITT Trim	ITT Trim	Maximum
(units)	(units)	(°C)	Spec (°C)
05SM	06PK	10.0	15

Trimmed N2		Т	rimmed Thrust	(lbf)	Indicated ITT after N1 & ITT Trim °C			
	Actual	Maximum	Actual	Minimum	Maximum	Actual	Minimum	Maximum
	(rpm)	Spec	(lbf)	Spec (lbf)	Spec (lbf)	(°C)	Spec	Spec
	48413.1	48851	2080.8	2074.6	2125.7	813.7	805.0	822.3

System Performance:

			Actual:	Limits:	Units	
Acceleration Time to 95% T/O Thrust:			5.95	6.66	Sec	
Decay Time to 63.2% of Delta Thrust:			3.40	4.00	Sec	
Start Time to Ground Idle:			16.9	30	Sec	
Oil Consumption:			39.86	48.0	mL/hr	
Corrected Oil Pressure @ Takeoff:	RDG#:	36	95.2	93.3-108.5	psig	
Oil Supply Temp @ Takeoff:	RDG#:	36	116.9	143	°C	

ACCEPTANCE TEST REPORT:

GE HONDA AERO ENGINES - HF120

DA30

34221-Q0A-P000 ECU S/W Ver:

ESN: DATE: 9/28/2017 CELL: HAI-B1 883327

34211-Q0A-L100

ASE2000LX

07

ECU S/W OSS P/N:

ADS Application

O_5F.1-2:

Vibration Levels	:							
Final Vibration Sur	vey: RDG #:	TR17						_
		N1/Rev:	Limit:	N2/Rev:	Limit:			
IM Case Radial:	IPS pk	0.08	0.15	0.11	0.40			
IM Case Tangentia	l: IPS pk	0.09	0.15	0.09	0.40			
IM Case Axial:	IPS pk	0.05	0.15	0.17	0.40			
General Characte	eristics:							
Type of Fuel:	JETA	Specific Gr	ravity (@60	0.8065°): 0.8065	5	Lower Heating Value:	18559	_
Type of Oil:	MOBIL JET II	Cell Factor	Cell Factor at T/O:		l e	Humidity (Grains)	93.387	
T2 °C:	28.9	T/Rise °F:	Rise °F:			Rel Humidity (%)	52.39	
Bellmouth S/N:	BU-13-001	Bellmouth.	Area:	236.2		Total Run Time:	11:27:28	
Barometer:	14.384							

11.1

8/1/2016

ECU AS P/N:

Issue Date:

ADS Summary: